


# SX5SRV OSCILLATOR



## Specifications

Parameters	Standard	Options
Frequency range	10,0 MHz - 30 MHz	
Logic output	True Sine Wave	
Frequency stability		
Overall	+ - 100 ppm	+ - 15 ppm
Initial at 25°C		
Temperature		
vs supply voltage change	included in overall tolerance	
vs load change		
Aging first year		
Operating temperature	0° C ~ +70°C	-20°C ~ +70°C -40°C ~ +85°C Other on custom request
Storage temperature	-55°C ~ +125°C	
Supply voltage	3.3 V + - 5% , 5.0 V + - 5%	
Current	1.2 mA typical	
Load	10 kOhm // 10 pF	
Output Level	1.0 V p-p typ.	
Start-up time	2 ms typ.	
Harmonics	< -25 dBc ( frequency dependent )	
Linearity	± 10% max.	
Frequency tuning range	± 50 ppm min	
Pulling slope	Positive	
External control voltage	+ 1,65 VDC ± 1,65 VDC , + 2,50 VDC ± 2,50 VDC	
Package	SX5 4 pad	

## Drawing

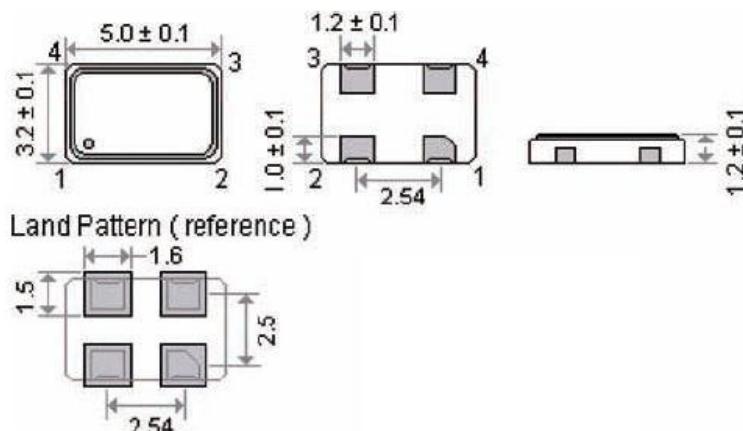

Pin configuration	<b>4 pad version</b>	
	#1: Control Voltage	
	#2 : GND	
	#3 : Output	
	#4 : Vcc	