

SX2SVT OSCILLATOR



Specifications		
Parameters	Standard	Options
Frequency range	12,000 MHz - 30,0 MHz	
Logic output	Clipped sinewave	
Frequency stability		
Overall		
Initial at 25°C	+/- 1,5 ppm	
Temperature	+/- 2,5 ppm	
vs supply voltage change	+/- 0,2 ppm	
vs load change		
Aging first year	+/-1,0ppm	
Aging over Years		
Operating temperature	-30°C ~ +75°C	-40°C ~ +85°C
		Other on custom request
Storage temperature	-40°C ~ +85°C	-55°C ~ +125°C
Supply voltage	2.8 V +/-5%	2.5V +/-5% , 3.0 V +/-5%
Current	2,0 mA max	
Load	10 Kohm // 10 pF	Other on custom request
Jitter	Please specify (if required)	
Phase noise		
Harmonics		
Sub-harmonics		
Start-up time	4 ms max.	
Marking	Freq + Code + Week +Year	

SX2SVT OSCILLATOR


Specifications

Voltage Control

External control voltage	1/2 VDC \pm 1,00 VDC	
Linearity	\pm 10% max.	
Frequency tuning range	\pm 9 ppm ~ \pm 15 ppm	Other on custom request
Pulling slope	Positive	

Drawing

Package	SX2 4pad	
---------	----------	--

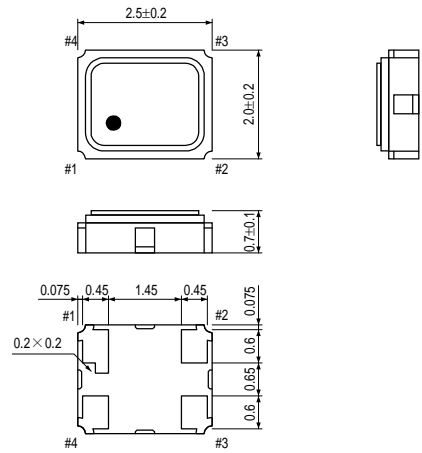

Pin configuration	#1 : Vco	
	#2 : GND	
	#3 : Output	
	#4 : Vcc	