

SX7C OSCILLATOR



Specifications


Parameters	Standard	Options
Frequency range	0,5 MHz - 160,000 MHz 32,768 kHz	
Logic output	HCMOS/TTL compatible	
Frequency stability		
Overall	+/- 50,0 ppm	+/-15 ppm best possible
Initial at 25°C	Please specify	
Temperature		
vs supply voltage change		
vs load change		
Aging first year		
Aging over Years		
Operating temperature	0° C ~ +70°C	-20°C ~ +70°C -40°C ~ +85°C Other on custom request
Storage temperature	-40°C ~ +85°C	-55°C ~ +125°C
Supply voltage	5,0 V ± 5% or 3,3 V +/-5%	1,8 V ; 2,5 V ; 2,8 V Other on custom request
Current		Other
0,500 MHz - 29,999 MHz	15 mA max.	
30,000 MHz - 49,999 MHz	20 mA max.	
50,000 MHz - 160,000 MHz	35 mA max.	
Load	15 pF	Other - dependent of logic output
Rise/fall time		Other on custom request
0,500 MHz - 29,999 MHz	10 ns max.	
30,000 MHz - 49,999 MHz	8 ns max.	
50,000 MHz - 160,000 MHz	4 ns max.	
Duty cycle	40/60 %	45/55 % Other on custom request
Phase noise	Please specify (if required)	
Harmonics		
Sub-harmonics		
Jitter		

SX7C OSCILLATOR

Specifications

Parameters	Standard	Options
Start-up time	10 ms max.	Other on custom request
Tristate	High or open = enable Low = disable	no tristate
Marking	Freq + Code + Week +Year	
Package	SX7 4 pad	SX7 6 pad

Drawing

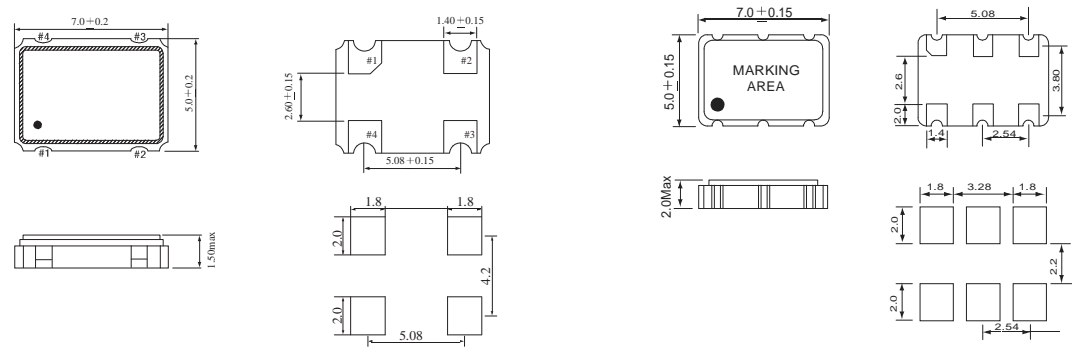

Pin configuration	4 pad version	6 pad version
	#1: E/D or NC	#1: E/D or NC
	#2 : GND	#2 : NC
	#3 : Output	#3 : GND
	#4 : Vcc	#4 : Output
		#5 : NC
	#6 : Vcc	