

SX7CSTR STRATUM III OSCILLATOR



Specifications


Parameters	Standard	
Frequency range	10 MHz - 52 MHz	STRATUM III up to 38,880 MHz
Logic output	HCMOS/TTL compatible	
Frequency stability		
Overall over 15 years	± 4,6 ppm	
Initial at 25°C	± 0,8 ppm	
Temperature	± 0,28 ppm	
Aging over 15 years	± 3,0 ppm	
Voltage change ± 5%	± 0,3 ppm	
24 hours drift	± 0,04 ppm	
24 hours holdover mode	± 0,37 ppm , full temp. range and Vcc ± 0,5%	
Operating temperature	0° C ~ +70°C	0°C ~ +50°C
Storage temperature	-40°C ~ +85°C	
Supply voltage	5,0 V ± 5%	3,3 V ± 5%
Current	20 mA max.	10 mA max.
Load	15 pF or 2 TTL	
Rise/fall time	5 ns max.	
Duty cycle	45 / 55 %	
Start-up time	10 ms max.	
Tristate	High or open = enable Low = disable	no tristate
Marking	Freq + Code + Week +Year	

SX7CSTR STRATUM III OSCILLATOR

Specifications

Drawing

Package	SX7 4pad	
---------	----------	--

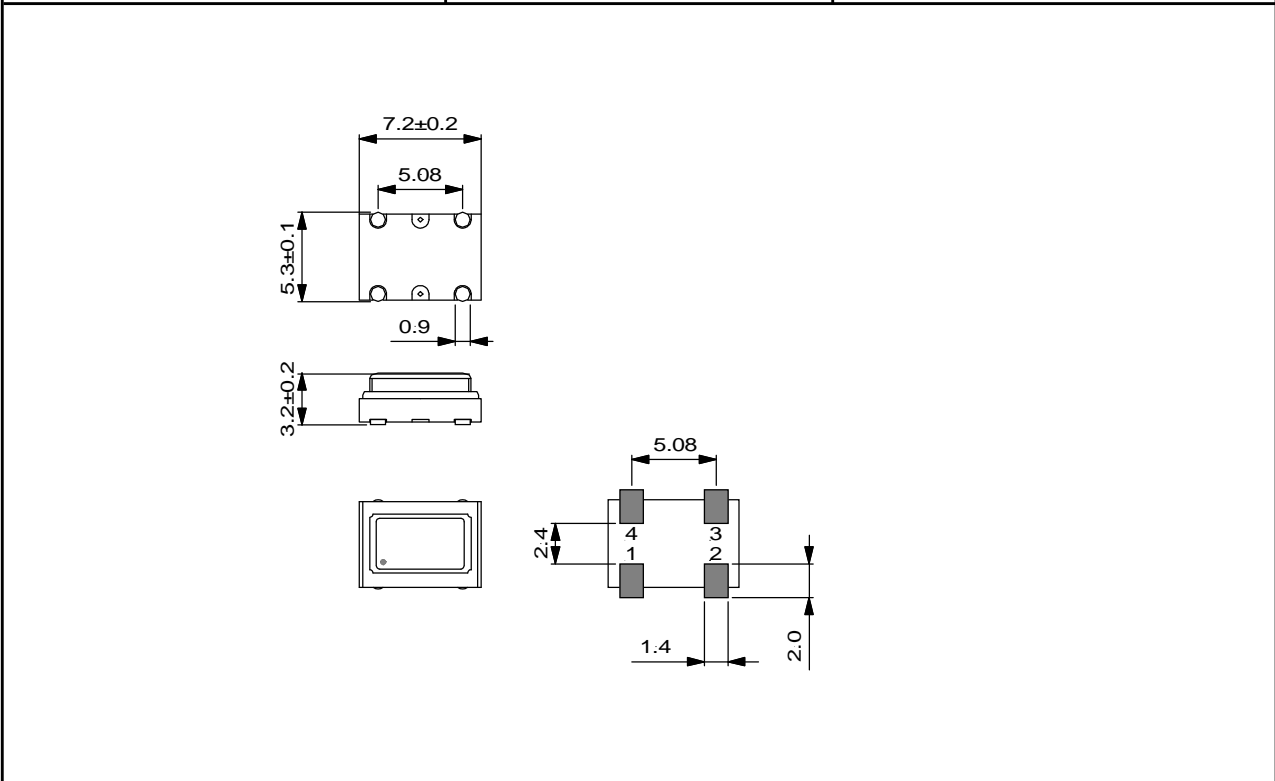

Pin configuration	#1: E/D	
	#2 : GND	
	#3 : Output	
	#4 : Vcc	