

# SX7CT OSCILLATOR



## Specifications

Parameters	Standard	Options
Frequency range	20.0 kHz - 50.0 kHz 1.25 Mhz - 800 Mhz	
Logic output	HCMOS	
Frequency stability		
Initial at 25°C	± 2.0 ppm	± 0.5 ppm
Temperature	± 3.0 ppm	
vs supply voltage change	± 0.3 ppm	
vs load change	± 0.3 ppm	
Aging first year	± 1.0 ppm	
Operating temperature	0° C ~ +70°C	-20°C ~ +70°C -40°C ~ +85°C Other on custom request
Storage temperature	-40°C ~ +85°C	-55°C ~ +125°C
Supply voltage	3,3 V +-5%	5,0 V ± 5% 3.0 V ± 5% , 2.8 V ± 5%
Current	65 mA max , depends on frequency	
Load	15 pF	
Rise/fall time	10 ns max. , depends on frequency ( 1.2 ns higher frequencies )	
Duty cycle	45/55	Other on custom request
Phase noise	Please specify ( if required )	
Harmonics		
Sub-harmonics		
Start-up time	5 ms typ.	
Marking	Freq + Code + Week +Year	


# SX7CT OSCILLATOR

## Specifications

Voltage Control Options		
External control voltage	+ 1,50 VDC $\pm$ 1,0 VDC	+2,5 VDC $\pm$ 2,0 VDC (5,0V)
Linearity	$\pm$ 10% max.	Other on custom request
Frequency tuning range	$\pm$ 6 ppm min	Other on custom request
Pulling slope	Positive	Other on custom request

## Drawing

Package	SX7 4 pad
---------	-----------

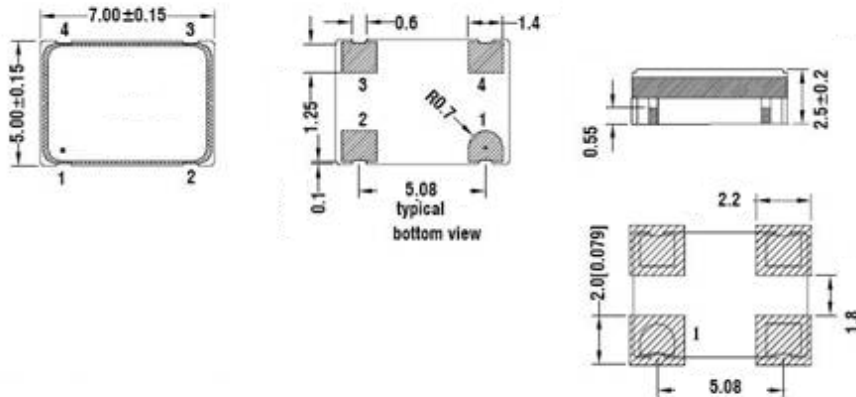

Pin configuration	#1 : NC / Vco	
	#2 : GND	
	#3 : Output	
	#4 : Vcc	