


# Ceramic Resonator - ZTA-series

## Specifications


Parameters	Standard	Options
Frequency range	1,800 MHz - 50,000 MHz	
Operating temperature	-20°C ~ +80°C	Other
Storage temperature	-40°C ~ +85°C	
Frequency tolerance at 25°C	± 0,5 %	Other
Frequency stability over temp. range	± 0,3 %	Other
Aging over 10 years	± 0,3 %	
Insulation resistance	500 Mohm min at 10 VDC	
Marking	Frequency	
Package	1,8 -13,0 MHz : ZTAC 2pin	
	13 - 50 MHz : ZTA 2 pin	

## Testcircuit

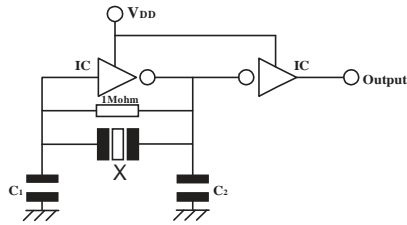

# Ceramic Resonator - ZTA-series

## Drawing

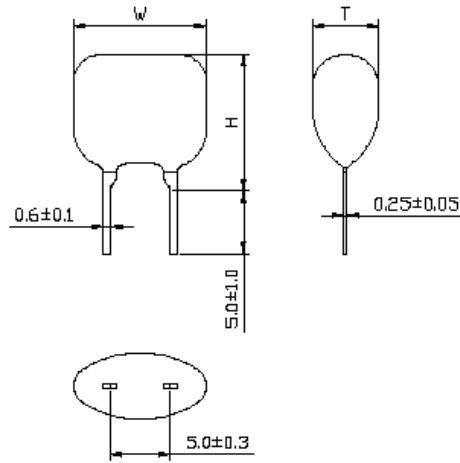

Code	W	H	T
ZTAC	10.0	7.5	5.0
ZTA	10.0	10.0	5.0